

Straight Joining

1. The end of one straw is creased and inserted into the other straw. Glue if necessary.



2. Ends flattened and glued.



3. Sleeve made from straw. Glue if necessary.




NOTE: It is possible to repair a buckled member of a structure by using method 3.

4. Pipecleaner insert.




Angled Joins

1. Flattened and angled - glue.

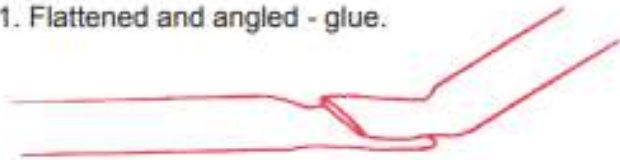

2. Straw flattened and wrapped round - glue.

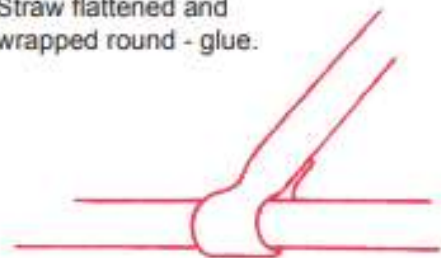

3. Straw split and fitted around - glue.

